

## A quick tour around the VI20i



## Domino. Do more.


## Technical Specification:


Print Specification         Intermittent Mode (M) and Continuous Mode (CM) in the same printer           Left hard/ Right hand         Beth options available (convertible with no extra parts in 15 minutes)           Print resolution         300 dpi           Maximum print area (MM)         32mm × 50mm           Maximum print area (MM)         32mm × 50mm           Speed range (CM)         400mm/s <sup>4</sup> Print respect rate (max)         6 prints? (with a 10mm long print) <sup>a</sup> Print respect rate (max)         6 prints? (with a 10mm long print) <sup>a</sup> Ribbon ave modes*         Execution Drive with unipue Daraing Arm tension control           Stop mid print         770m (up to 1925m effective length with Economy Mode)           Standard Ribbon widths         34mm, 22mm           Ribbon ave modes*         Execution Mode           Column Mode         Yes           Stap mid print         Yes           Print features         Date code format           State code format         Yes           Stift codes         Yes           Special and With and the maxingation via, large, easy to read buttons and loons.           WYSIMYCG print preview. Multilanguage support           Controller options         No dedicated controller required.           Options:         Domino TackPard (10/1) <tr< th=""><th>Printing Modes Intermittent Mode (MP) and Continuous Mode (CMP) in the same printer Left hand / Right hand Both options available (convertible with no extra parts in 15 minutes) 300 dpi 32mm × 500mm Prints peed (name) 130 mm × 500mm Prints peed (name) 10 mm × 750 mm/s<sup>4</sup> prints peed (name)</th><th></th><th>V120i</th></tr<>	Printing Modes Intermittent Mode (MP) and Continuous Mode (CMP) in the same printer Left hand / Right hand Both options available (convertible with no extra parts in 15 minutes) 300 dpi 32mm × 500mm Prints peed (name) 130 mm × 500mm Prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name) 10 mm × 750 mm/s <sup>4</sup> prints peed (name)		V120i
Economy Mode       Variable in 1% increments up to 60%         Retraction Mode       Less than 1 mm gap between prints         Column Mode       Yes         Print features       Past code format         Date code format       Yes         Offsets       Yes         Strip mid print       Yes         Shift codes       Yes         Strip mode       Yes         Strip mode       Yes         Graphical User Interface       QuickStep, full colour Interface Intuitive navigation via, large, easy to read buttons and Icons         WYSIWYG print preview. Multianguage support       Controller options         Controller options       No deficated controller required.         Options       • Domino TouchPad (5.7')         • Domino TouchPad (5.7')       • Domino TouchPad (5.7')         • Domino TouchPad (5	Economy Mode       Variable in 1% increments up to 60%         Retraction Mode       Less than 1 mm gap between prints         Stop mid print       Yes         Print features       Part code format         Date code format       Yes         Offsets       Yes         Stop mid print       Yes         Shift codes       Yes         Strint number generation       Yes         Graphical User Interface       QuickStep, full colour Interface Intuitive navigation via, large, easy to read buttons and Icons         WYSWYG print preview. Multilanguage support       Controller codes         Controller options       No dedicated controller required.         Options       • Domino TouchPad (S.7')         • Domino TouchPad (S.7')       • Domino TouchPad (S.7')	Printing Modes Left hand / Right hand Print resolution Maximum print area (IM) Maximum print area (CM) Print speed (max) (IM) Speed range (CM) Print repeat rate (max) Ribbon drive technology Max ribbon length	Both options available (convertible with no extra parts in 15 minutes) 300 dpi 32mm x 55mm 32mm x 50mm 400mm/s* 10 mm/s - 750 mm/s* 6 prints/s (with a 10mm long print)* <b>i-Tech</b> Ribbon Drive with unique Dancing Arm tension control 770m (up to 1925m effective length with Economy Mode)
Date code format Offsets     Yes Yes       Offsets     Yes Serial number generation Fonts     Yes Most true type fonts       Bar codes     Yes       Iogos / bitmaps     Yes       Graphical User Interface     QuickStep, full colour Interface Intuitive navigation via, large, easy to read buttons and Icons. WYSIWYG print preview. Multilanguage support       Controller options     No declated controller required. Options: • Domino TouchPad (5.7") • Domino TouchPad (10.4") • PC based interface (val Ethernet cable or network)       Connectivity     Ethernet / USB x 2 / mini USB (service)       Inputs     Print Go, Encoder       Outputs     Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)       Special features     Master slave, macros, password, fastmode       Label creation     Onboard and via QuickDeeign (PC application included)       Electrical requirements     90v - 264v AC 50/60Hz, OR 24v DC (+/-28) at 5A (if direct)       Dimensions     (W) 218.0mm x (H) 160.0mm x (D) 149.5mm       Weight     5.6kg       TouchPad Specification     5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.       Connectivity     USB, Ethernet, Hini USB (for power / data connection to printer)       Wieght     0.4kg       TouchPard Specification     Certified to IP65       TouchPard Specification     Certified to IP65       Connectivity     USB, Ether	Date code format       Yes         Offsets       Yes         Serial number generation       Yes         Fonts       Most true type fonts         Bar codes       Yes         Logos / bitmaps       Yes         Graphical User Interface       QuickStep, full colour Interface Intuitive navigation via, large, easy to read buttons and Icons. WYSIWYG print preview. Multilanguage support         Controller options       No declated controller required. Options: • Domino TouchPad (5.7") • PC based interface (via Ethernet cable or network)         Connectivity       Ethernet / USB x 2 / mini USB (service)         Inputs       Print Go, Encoder         Outputs       Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)         Special features       Master slave, macros, password, fastmode         Label creation       Onboard and via QuickDesign (PC caplication included)         Electrical requirements       90v - 264v AC 50/60Hz, OR 24v DC (+/ 286) at 5A (if direct)         Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Yeg       S.4 (all colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Hin USB (for power / data connection to printer)         Wight       0.4 kg </th <th>Economy Mode Retraction Mode Column Mode</th> <th>Less than 1 mm gap between prints Yes</th>	Economy Mode Retraction Mode Column Mode	Less than 1 mm gap between prints Yes
WYSWYG print preview. Multilanguage support           Controller options         No dedicated controller required. Options: <ul> <li>Domino TouchPad (5.7'')</li> <li>Domino TouchPad (5.7'')</li> <li>Domino TouchPad (5.7'')</li> <li>Print Go, Encoder</li> </ul> Outputs         Print Go, Encoder           Outputs         Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)           Special features         Master slave, macros, password, fastmode           Label creation         Onboard and via QuickDesign (PC application included)           Electrical requirements         90v – 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)           Dimensions         (W) 218.0mm x (H) 160.0mm x (D) 149.5mm           Weight         5.6kg           TouchPad Specification         Trich, full colour touchscreen (640x480 resolution). Handheld with docking station included.           Connectivity         USB, Ethernet, Mini USB (for power / data connection to printer)           Dimensions         (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station           Weight         0.4kg           TouchPad Specification         Certified to IP65           Connectivity         1.2 indt,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets           I.P Protection         Certified to IP65 </th <td>WYSWYG print preview. Multilanguage support           Controller options         No dedicated controller required. Options: <ul> <li>Domino TouchPad (5.7')</li> <li>Domino TouchPad (5.7')</li> <li>Domino TouchPad (5.7')</li> <li>Print Go, Encoder</li> </ul>            Outputs         Print Go, Encoder           Outputs         Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)           Special features         Master slave, macros, password, fastmode           Label creation         Onboard and via QuickDesign (PC application included)           Electrical requirements         90v – 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)           Dimensions         (W) 218.0mm x (H) 160.0mm x (D) 149.5mm           Weight         5.6kg           TouchPad Specification         Trich, full colour touchscreen (640x480 resolution). Handheld with docking station included.           Connectivity         USB, Ethernet, Mini USB (for power / data connection to printer)           Dimensions         (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station           Weight         0.4kg           TouchPadel         Sectification           Type         10.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets           I.P Protection         Cerrtified to IP65</td> <th>Date code format Offsets Shift codes Serial number generation Fonts Bar codes</th> <td>Yes Yes Most true type fonts Yes</td>	WYSWYG print preview. Multilanguage support           Controller options         No dedicated controller required. Options: <ul> <li>Domino TouchPad (5.7')</li> <li>Domino TouchPad (5.7')</li> <li>Domino TouchPad (5.7')</li> <li>Print Go, Encoder</li> </ul> Outputs         Print Go, Encoder           Outputs         Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)           Special features         Master slave, macros, password, fastmode           Label creation         Onboard and via QuickDesign (PC application included)           Electrical requirements         90v – 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)           Dimensions         (W) 218.0mm x (H) 160.0mm x (D) 149.5mm           Weight         5.6kg           TouchPad Specification         Trich, full colour touchscreen (640x480 resolution). Handheld with docking station included.           Connectivity         USB, Ethernet, Mini USB (for power / data connection to printer)           Dimensions         (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station           Weight         0.4kg           TouchPadel         Sectification           Type         10.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets           I.P Protection         Cerrtified to IP65	Date code format Offsets Shift codes Serial number generation Fonts Bar codes	Yes Yes Most true type fonts Yes
Options:       • Domino TouchPad (5.7")         • Domino TouchPade (10.4")       • PC based interface (via Ethernet cable or network)         Connectivity       Ethernet / USB x 2 / mini USB (service)         Inputs       Print Go, Encoder         Outputs       Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)         Special features       Master slave, macros, password, fastmode         Label creation       Onboard and via QuickDesign (PC application included)         Electrical requirements       90v - 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)         Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Weight       5.6kg         TouchPad Specification       Trype         Type       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station, (W) 181mm x (H) 250mm x (D) 50mm including docking station, (W) 181mm x (H) 250mm x (H) 240 WAC, 50/60 Hz         TouchPanel Specification       Certified to IP65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dim	Options:       • Domino TouchPad (5.7')         • Domino TouchPade (10.4'')       • PC based interface (via Ethernet cable or network)         Connectivity       Ethernet / USB x 2 / mini USB (service)         Inputs       Print Go, Encoder         Outputs       Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)         Special features       Master slave, macros, password, fastmode         Label creation       Onboard and via QuickDesign (PC application included)         Electrical requirements       90v - 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)         Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Weight       5.6kg         TouchPad Specification       Trype         Type       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station, (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.x USB, Ethernet         Electrical requirements       1002/40 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D)	Graphical User Interface	
Inputs       Print Go, Encoder         Outputs       Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)         Special features       Master slave, macros, password, fastmode         Label creation       Onboard and via QuickDesign (PC application included)         Electrical requirements       90v – 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)         Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Weight       5.6kg         TouchPad Specification       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       104. inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg	Inputs       Print Go, Encoder         Outputs       Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)         Special features       Master slave, macros, password, fastmode         Label creation       Onboard and via QuickDesign (PC application included)         Electrical requirements       90v – 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)         Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Weight       5.6kg         TouchPad Specification       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       Certified to 1P65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg         PSU Specification       (W) 67 mm x (H) 34 mm x (D) 166 mm         Weight       0.4 Kg	Controller options	Options: • Domino <b>TouchPad</b> (5.7") • Domino <b>TouchPanel</b> (10.4")
Outputs         Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)           Special features         Master slave, macros, password, fastmode           Label creation         Onboard and via QuickDesign (PC application included)           Electrical requirements         90v – 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)           Dimensions         (W) 218.0mm x (H) 160.0mm x (D) 149.5mm           Weight         5.6kg           TouchPad Specification         5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.           Connectivity         USB, Ethernet, Mini USB (for power / data connection to printer)           Dimensions         (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station           Weight         0.4kg           TouchPanel Specification         Certified to IP65           Connectivity         2 x USB, Ethernet           I.P. Protection         Certified to IP65           Connectivity         2 x USB, Ethernet           IBectrical requirements         100/240 VAC, 50/60 Hz           Dimensions         (W) 307mm x (H) 232mm x (D) 75mm           Weight         2.8kg	Outputs         Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)           Special features         Master slave, macros, password, fastmode           Label creation         Onboard and via QuickDesign (PC application included)           Electrical requirements         90v – 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)           Dimensions         (W) 218.0mm x (H) 160.0mm x (D) 149.5mm           Weight         5.6kg           TouchPad Specification         5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.           Connectivity         USB, Ethernet, Mini USB (for power / data connection to printer)           Dimensions         (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station           Weight         0.4kg           TouchPanel Specification         Certified to IP65           Connectivity         2 x USB, Ethernet           I.P. Protection         Certified to IP65           Connectivity         2 x USB, Ethernet           IBectrical requirements         100/240 VAC, S0/60 Hz           Dimensions         (W) 307mm x (H) 232mm x (D) 75mm           Weight         2.8kg	Connectivity	Ethernet / USB × 2 / mini USB (service)
Special features       Master slave, macros, password, fastmode         Label creation       Onboard and via QuickDesign (PC application included)         Electrical requirements       90v - 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)         Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Weight       5.6kg         TouchPad Specification       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       10.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg         PSU Specification       (W) 67 mm x (H) 34 mm x (D) 166 mm         Dimensions       (W) 67 mm x (H) 34 mm x (D) 166 mm	Special features       Master slave, macros, password, fastmode         Label creation       Onboard and via QuickDesign (PC application included)         Electrical requirements       90v - 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)         Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Weight       5.6kg         TouchPad Specification       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       10.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg         PSU Specification       CW) 67 mm x (H) 34 mm x (D) 166 mm         Dimensions       (W) 67 mm x (H) 34 mm x (D) 166 mm	Inputs	Print Go, Encoder
Label creation       Onboard and via QuickDesign (PC application included)         Electrical requirements       90v – 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)         Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Weight       5.6kg         TouchPad Specification Type       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification Type       10.4 inch,full colour touchscreen (800×600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg         PSU Specification Dimensions       (W) 67 mm x (H) 34 mm x (D) 166 mm         Weight       0.4 Kg	Label creation       Onboard and via QuickDesign (PC application included)         Electrical requirements       90v – 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)         Dimensions       (W) 218.0mm × (H) 160.0mm × (D) 149.5mm         Weight       5.6kg         TouchPad Specification Type       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm × (H) 128mm × (D) 34mm excluding docking station, (W) 181mm × (H) 135mm × (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification Type       10.4 inch,full colour touchscreen (800×600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 × USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm × (H) 232mm × (D) 75mm         Weight       2.8kg         PSU Specification Dimensions       (W) 67 mm × (H) 34 mm × (D) 166 mm         Weight       0.4 Kg	Outputs	Error, Ready, Ribbon, Warning, Spare (sofware configurable volt free contacts)
Electrical requirements       90v – 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)         Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Weight       5.6kg         TouchPad Specification       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       Certified to IP65         Connectivity       2 x USB, Ethernet         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg	Electrical requirements       90v - 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)         Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Weight       5.6kg         TouchPad Specification       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       Certified to IP65         Connectivity       2 x USB, Ethernet         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         ID0/240 VAC, 50/60 Hz       Dimensions         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg         PSU Specification       Certified to IP65 mm x (H) 34 mm x (D) 166 mm         Dimensions       (W) 67 mm x (H) 34 mm x (D) 166 mm         Weight       0.4 kg	Special features	Master slave, macros, password, fastmode
Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Weight       5.6kg         TouchPad Specification       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       Type         Type       10.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg	Dimensions       (W) 218.0mm x (H) 160.0mm x (D) 149.5mm         Weight       5.6kg         TouchPad Specification       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       Type         Type       10.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg	Label creation	Onboard and via QuickDesign (PC application included)
Weight     5.6kg       TouchPad Specification     5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.       Connectivity     USB, Ethernet, Mini USB (for power / data connection to printer)       Dimensions     (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station       Weight     0.4kg       TouchPanel Specification     10.4 inch,full colour touchscreen (800×600 resolution) VESA mountable with optional brackets       I.P. Protection     Certified to IP65       Connectivity     2 x USB, Ethernet       Electrical requirements     100/240 VAC, 50/60 Hz       Dimensions     (W) 307mm x (H) 232mm x (D) 75mm       Weight     2.8kg       PSU Specification     (W) 67 mm x (H) 34 mm x (D) 166 mm       Weight     0.4 kg	Weight     5.6kg       TouchPad Specification     5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.       Connectivity     USB, Ethernet, Mini USB (for power / data connection to printer)       Dimensions     (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station       Weight     0.4kg       TouchPanel Specification     10.4 inch,full colour touchscreen (800×600 resolution) VESA mountable with optional brackets       I.P. Protection     Certified to IP65       Connectivity     2 x USB, Ethernet       Electrical requirements     100/240 VAC, 50/60 Hz       Dimensions     (W) 307mm x (H) 232mm x (D) 75mm       Weight     2.8kg       PSU Specification     (W) 67 mm x (H) 34 mm x (D) 166 mm       Weight     0.4 kg	Electrical requirements	90v – 264v AC 50/60Hz, OR 24v DC (+/- 2%) at 5A (if direct)
TouchPad Specification         Type         5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       10.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg         PSU Specification       (W) 67 mm x (H) 34 mm x (D) 166 mm         Weight       0.4 Kg	TouchPad Specification         Type         5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       10.4 inch,full colour touchscreen (800×600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg         PSU Specification       (W) 67 mm x (H) 34 mm x (D) 166 mm         Weight       0.4 Kg	Dimensions	(W) 218.0mm x (H) 160.0mm x (D) 149.5mm
Type       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       10.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg         PSU Specification       (W) 67 mm x (H) 34 mm x (D) 166 mm         Weight       0.4 Kg	Type       5.7 inch, full colour touchscreen (640x480 resolution). Handheld with docking station included.         Connectivity       USB, Ethernet, Mini USB (for power / data connection to printer)         Dimensions       (W) 173mm x (H) 128mm x (D) 34mm excluding docking station, (W) 181mm x (H) 135mm x (D) 50mm including docking station         Weight       0.4kg         TouchPanel Specification       10.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 x USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm x (H) 232mm x (D) 75mm         Weight       2.8kg         PSU Specification       (W) 67 mm x (H) 34 mm x (D) 166 mm         Weight       0.4 Kg	Weight	5.6kg
Weight     0.4kg       TouchPanel Specification     I.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets       I.P. Protection     Certified to IP65       Connectivity     2 × USB, Ethernet       Electrical requirements     100/240 VAC, 50/60 Hz       Dimensions     (W) 307mm × (H) 232mm × (D) 75mm       Weight     2.8kg       PSU Specification     (W) 67 mm × (H) 34 mm × (D) 166 mm       Weight     0.4 Kg	Weight     0.4kg       TouchPanel Specification Type     10.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets       I.P. Protection     Certified to IP65       Connectivity     2 × USB, Ethernet       Electrical requirements     100/240 VAC, 50/60 Hz       Dimensions     (W) 307mm × (H) 232mm × (D) 75mm       Weight     2.8kg       PSU Specification Weight     (W) 67 mm × (H) 34 mm × (D) 166 mm	Type	station included. USB, Ethernet, Mini USB (for power / data connection to printer) (W) 173mm x (H) 128mm x (D) 34mm excluding docking station,
Type       10.4 inch,full colour touchscreen (800×600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 × USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm × (H) 232mm × (D) 75mm         Weight       2.8kg         PSU Specification         Dimensions       (W) 67 mm × (H) 34 mm × (D) 166 mm         Weight       0.4 Kg	Type       10.4 inch,full colour touchscreen (800X600 resolution) VESA mountable with optional brackets         I.P. Protection       Certified to IP65         Connectivity       2 × USB, Ethernet         Electrical requirements       100/240 VAC, 50/60 Hz         Dimensions       (W) 307mm × (H) 232mm × (D) 75mm         Weight       2.8kg         PSU Specification         Dimensions       (W) 67 mm × (H) 34 mm × (D) 166 mm         Weight       0.4 Kg	Weight	
Dimensions         (W) 67 mm x (H) 34 mm x (D) 166 mm           Weight         0.4 Kg	Dimensions         (W) 67 mm x (H) 34 mm x (D) 166 mm           Weight         0.4 Kg	Type I.P. Protection Connectivity Electrical requirements Dimensions	with optional brackets Certified to IP65 2 x USB, Ethernet I 00/240 VAC, 50/60 Hz (W) 307mm x (H) 232mm x (D) 75mm
	Environmental requirements Temperature: 5°C to 40°C. Humidity: 20-80%, non condensing	Dimensions	
Environmental requirements Temperature: 5°C to 40°C. Humidity: 20-80%, non condensing		Environmental requirements	Temperature: 5°C to 40°C. Humidity: 20-80%, non condensing

 $\ast Note:$  Capability is dependent upon application and substrate type as well as message length

## www.dominosystems.dk

\_\_\_\_\_





10,4%

# \_0\_

Domino Systems A/S Marielundvej 46A 2730 Herlev

Tlf.: (+45) 70 20 64 16 E-mail: kontakt@



# The VI20i thermal transfer printer

Saving you time and money

The cost-effective, adaptable printing solution for flexible packaging.



Domino. Do more.

DOMINO

V 120i



### The affordable, advanced solution for small, high-quality product codes.

Digital thermal transfer coding with the VI20i offers you superior print quality, profitability and lower running costs.

Even against comparable thermal transfer coders our revolutionary new **i-Tech** Ribbon Drive uses up to 60% less ribbon.

Combined with easy installation, versatility and reliable performance, renowned global support from Domino makes VI20i the perfect choice for both manufacturers and packaging machinery OEMs.

### A diverse range of applications

Domino's VI20i printer is ideal for goods packed using VFFS, HFFS machines and labellers, across wide-ranging food and healthcare applications.




Variable data with no manual set up



Print alpha numeric text and logos over a rge area



Simple creation of codes using a variety character sets

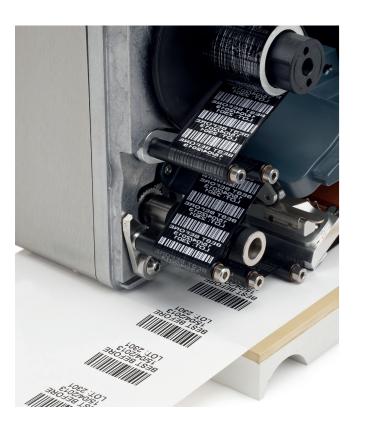

Clear, high resolution codes every time

## Greener credentials

Domino is committed to sound environmental practices and minimising the consumption of natural resources and energy and the creation of waste. We invest in our supply chain to ensure good social and environmental practice and we are supportive of developments to improve corporate accountability. Wherever practical, our products are RoHS and WEEE compliant.

#### V120i

nnovative design has enabled a 50% reduction in weight (compared to previous models), helping to minimise environmental impact. Moreover, by enabling you to use up to 60% less ribbon and no compressed air, the Domino V120i also helps you to reduce your carbon footprint.

#### Versatile

Our 300dpi resolution digital print head can print logos as well as text over a wide area offering greater coding capability. It guarantees a consistent readable code every time, compared to typeface that becomes worn through the high impact of hotstamp.

# Quick and easy to install

#### Compact

The VI20i is compact, allowing it to fit simply into many existing coding spaces. A small power supply, few cable connections and installation by automatically the opportunity to control many printers from one interface makes for a quick and simple installation. of a button – without the need

#### Smart

AutoAlign, our unique

(patent applied for) head control technology, simplifies aligning the print head to the optimum position at the touch for shims or tools.



It also controls the print head electronically, eliminating the need for compressed air.

## Lowest running costs – thanks to the **i-Tech** Ribbon Drive

#### Economical

Domino's **i-Tech** Ribbon Drive offers 4 ribbon save settings including 'Economy Mode' which allows you to use up to 60% less ribbon per print – without affecting print quality. As well as reducing ribbon costs this increases the effective ribbon roll length, significantly reducing costs associated with ribbon changeovers.



## Going digital means sharp coding and greater profitability



#### Real time

A real time clock allows variable data such as date and time information to be updated automatically between prints with no manual intervention, minimising the risk of costly coding errors.



Ouick

WYSIWYG selection of electronically stored messages ensures quick, error free ob changes.

## Performance to match your application

#### Configurable

Intermittent or Continuous Mode is offered in the same unit, which can quickly convert between Left and Right handing to be ready to fit all applications.

You do not need a dedicated controller – use any PC based interface with the VI20i, including a host packaging machine interface, to meet the needs of your application.



#### Versatile

The VI20i can print from low to high speeds (10-750mm/sec). The integrated print head heater ensures consistent code quality, even at low operating temperatures.



#### Ribbons

Full range of Domino approved ribbons that comply with latest legislative and environmental standards.





#### Reliable



Downtime caused by ribbon breaks is virtually eliminated by **i-Tech's** unique Dancing Arms, which constantly maintain ribbon tension. Additionally, the system does not need compressed air, further improving reliability and reducing running costs.

## Easy to use

QuickStep User Interface - no action is more than 3 taps away

QuickStep is our unique, simplified operator interface that gets the printer in action as quickly as possible. No complex menus or parameters, just enter the job and away you go.



- Large user friendly icons and customisable home screen for quick access to favourite menus and settings
- Create and edit messages easily using the WYSIWYG drag and drop message editor at the line side
- Intuitive 3-tier menu structure makes QuickStep quick to learn and simple to remember
- Simplified Message Store and live WYSIWYG message preview to speed up changeovers and help eliminate coding selection errors

#### QuickDesign Lite - Simplifying message design

QuickDesign Lite is a single, easy to use Windows® application that gives you the flexibility of creating all types of coding messages from a remote PC. It also lays the foundation for providing increased automation of your coding needs.



- Simply create, edit and send your message to your V320i by network or USB stick
- Simplifies generation of complex messages, including full Unicode character support
- Available for yourV320i at no extra cost
- Easily upgradeable to *QuickDesign* for increase connectivity, control and Coding Automation capabilities

## Domino. Do more.

