

# M230i-CW

## Reliable and secure labelling

The M-Series CornerWrap models, **M230i-CW100** and **M230i-CWR100**, are flexible and reliable automated Print & Apply solutions used for labelling over a corner. Both models handle a variety of label sizes whilst minimising its use of production space.



## Performance

- ◆ Automatic stroke adaptation to product distances up to 280 mm optimises your throughput.
- ◆ Articulated pad allows for label delivery to product panel variances.
- ◆ Label Check sensor (optional) ensures the label does not get lost, ensuring customer satisfaction for your end user.

Scan with camera  
to watch it operate



## Maximum uptime

- ◆ 600 m ribbon & label roll capacity within a compact footprint.
- ◆ Unique pad design allows for any label variation without changeover.
- ◆ Easy to change long life thermal print heads.

## Simple operation

- ◆ Clear monitoring & control with optional **TouchPanel** colour user interface.
- ◆ Robust design with left and right models to meet the best operating position.
- ◆ Simple preventative maintenance access points.





## Accurate label placement

The unique dual pad design ensures label placement accuracy to facilitate consistent downstream barcode reading, with the ability to handle variable label sizes.

M-Series also offers a reversed model, **M230i-CWR**, in order to achieve the best operator comfort and an optimal implementation of the system to your production line.



## Optional **TouchPanel** User Interface

For effortless control and status reporting **TouchPanel** is our unique, simplified operator interface that gets the printer into action quickly and simply. No complex menus or parameters, just enter the job and away you go.

- ◆ Quick access to favourite menus and settings via large user-friendly icons and customisable home screen.
- ◆ Easy prompted input of data into label templates.
- ◆ Speed up changeovers and help eliminate coding selection errors with simplified message store and live WYSIWYG preview.

## Technical Specification

For labelling over a corner, the **M230i-CW** or **M230i-CWR** can be configured to suit your specific needs. All M-Series units are equipped with a powerful Printer Control Unit (PCU).


	<b>M230i-CW100</b>	<b>M230i-CWR100</b>
Print width	108 mm (4")	162 mm (6")
Print technology	Thermal Transfer / Direct Thermal	
Resolution	12 dots/mm (300dpi)	
Orientation	Left hand or Right hand	
Label & Ribbon lengths	Up to 600 m	
Typical capacity	12 labels/min	12 labels/min
Distance to product (to center of pad)	Up to 280mm	
Label sizes (WxL)	75x150* mm - 110-254* mm *Corner wrap applications	
Dimensions (HxWxL)	654 x 262 x 715 mm	654 x 262 x 716 mm

	PCU
Communication	2xRS232, 1xUSB 2.0, Ethernet
I/Os (configurable)	10 Inputs and 10 Outputs
User interface	Graphical display with 25 languages
Dimensions (HxWxL)	130 x 280 x 405 mm

**M230i-CW100**



**M230i-CWR100**

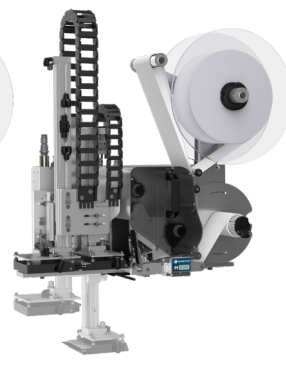

[www.domino-printing.com](http://www.domino-printing.com)